

Hydraulic Folding Rollers

Available in 5.5m (18ft) model with 750mm (30 inch) diameter drums

- Can be filled with water for extra weight and can be transported fully laden
- Heavy duty 12mm drum wall thickness
- All drums are air tested after welding
- Heavy duty construction throughout with unique hinged draw-bar
- Fitted with spring steel shaft
- 2 minute change over from working to transport mode
- Transport width 2.7m
- Lights fitted as standard
- Independent floating rollers for constant ground pressure
- All hinge points easily accessible for greasing
- Hardwood bearing absorbs impact for longer life
- Hardwood bearing for easy greasing and low cost maintenance
- Performance; 25-28 acres per hour
- 100 - 110 horse power required



Specifications


Landroller	18*30*1/2	8ft Tandem	10ft Tandem	10*30*3/8	10*36*1/2	9*36*5/8	9*36*1/2	8*36*1/2	8*30*1/2	8*30*3/8	8*24*1/4	6.6*24*1/4	5*24*1/4	4*24*1/4
Rolling Width	5.4m	4.84m	6m	3m	3m	2.74m	2.74m	2.42m	2.42m	2.42m	2.42m	1.98m	1.50m	1.25m
Overall Width	5.65m	5.24m	6.25m	3.22m	3.22m	2.95m	2.95m	2.62m	2.62m	2.62m	2.62m	2.18m	1.71m	1.45m
Drum Diameter	745mm	740mm	740mm	740mm	885mm	890mm	885mm	885mm	745mm	740mm	590mm	590mm	590mm	590mm
Drum Thickness	12mm	10mm	10mm	10mm	12mm	16mm	12mm	12mm	10mm	10mm	6mm	6mm	6mm	6mm
Side Wall Thickness	5mm	5mm	5mm	5mm	6mm	6mm	6mm	6mm	5mm	5mm	5mm	5mm	5mm	5mm
Pick up Ring	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	JAW	JAW
Three P.L	NO	NO	NO	NO	NO	NO	NO	NO	YES	YES	YES	YES	NO	NO
Centre Shaft	65mm Carbon Steel	65mm	75mm	75mm	75mm	75mm	75mm	65mm	65mm	65mm	50mm	50mm	50mm	50mm
H.Wood Bearing	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
Grease Points	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
Unladen Weight	3000kgs	1940kgs	1170kgs	1760kgs	1000kgs	1180kgs	1075kgs	970kgs	775kgs	685kgs	400kgs	320kgs	227kgs	200kgs
Laden Weight	5450kgs	4150kgs	4500kgs	2248kgs	2970kgs	2980kgs	2875kgs	2770kgs	1880kgs	1790kgs	1100kgs	900kgs	805kgs	565kgs
Scraper Blade	Standard on centre drum	Standard	Standard	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Wheel Kit	Standard	N/A	N/A	N/A	N/A	Optional	Optional	Optional	N/A	N/A	N/A	N/A	N/A	N/A

Due to a policy of continual improvement the company reserve the righth to change price or specification without notice

We strongly recommend that all water ballast rollers are drained over the winter months

FLEMING AGRI-PRODUCTS LTD Newbuildings Industrial Estate, Newbuildings, Northern Ireland BT47 2SX
 Tel: +44 (0)28 7134 2637 Fax: +44 (0)28 7134 4735 Email: info@fleming-agri.co.uk www.fleming-agri.co.uk

Landrollers

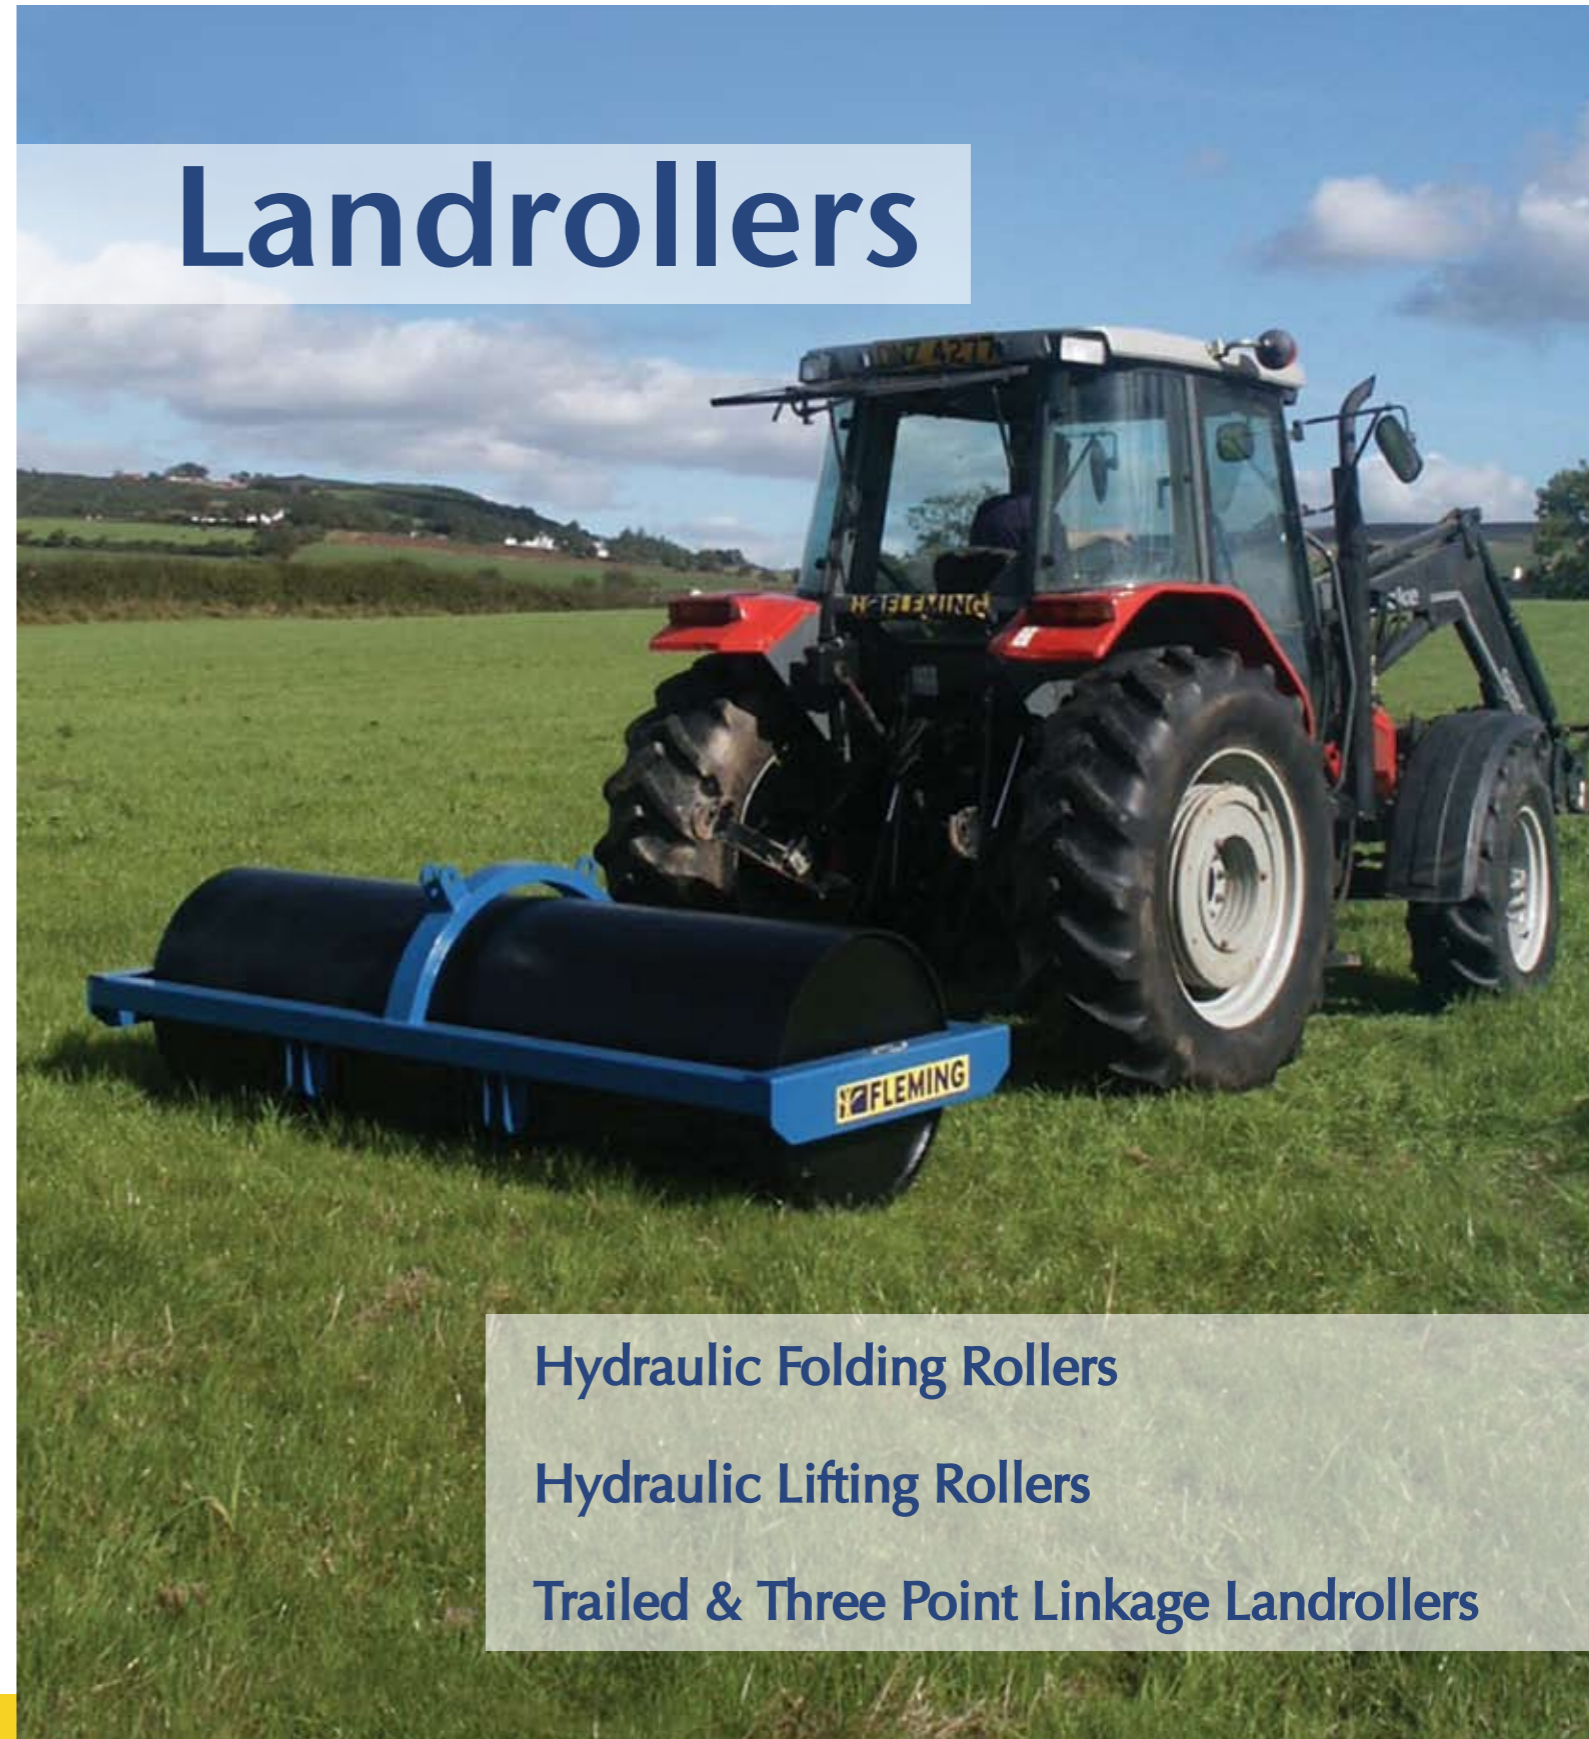

Hydraulic Folding Rollers

Hydraulic Lifting Rollers


Trailed & Three Point Linkage Landrollers

Fleming's have been manufacturing landrollers for over 40 years, resulting in a wealth of technical experience in this field. The model range now stretches from 1.2m – 6m in widths, diameters of 590mm, 740mm and 890mm with wall thicknesses from 6mm–16mm.

Designed initially for agricultural grassland and cereals, Fleming rollers are now used on a wide variety of applications, from parkland & sports fields, Horse menage and gallops, for horticultural use as well as the manufacture and maintenance of golf courses and sports pitches.

Compact Tractor Landrollers

Compact tractor rollers have a 590mm (2ft) diameter drum with 6mm wall thickness. Ideal for hobby farming, parkland, sports pitches, horse menages, horticultural use etc.

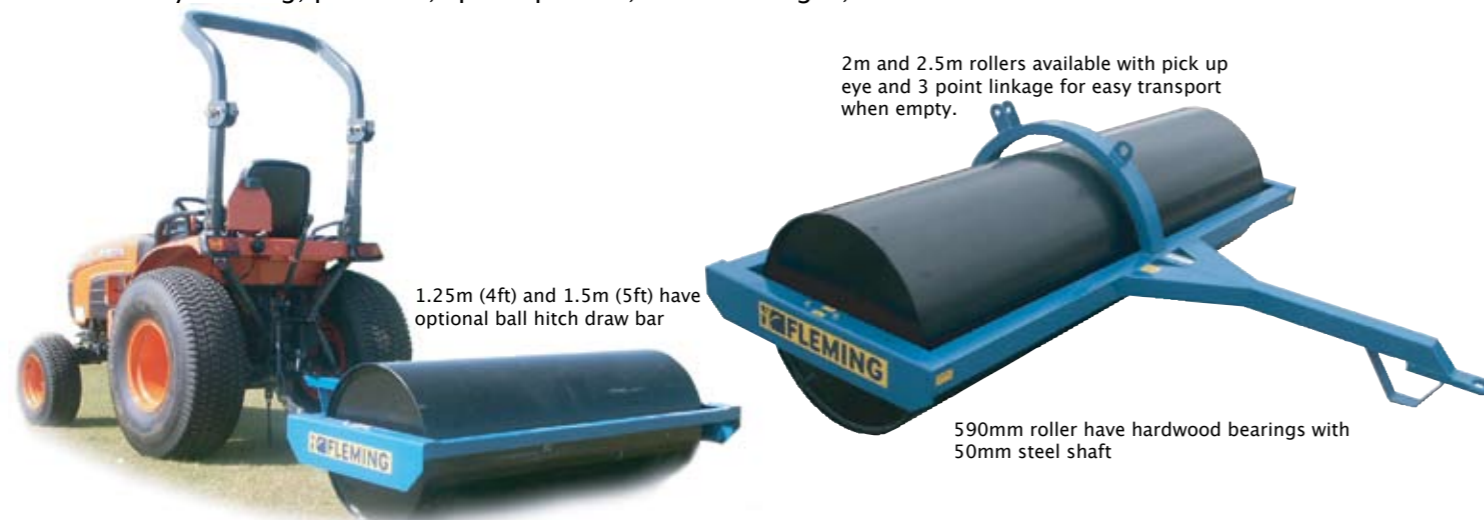

Can be filled with water for extra weight. All drums are air tested after welding.

Hydraulic Lifting Rollers

Fleming Agri-Products Ltd have developed a range of hydraulic lifting and folding water ballast landrollers and are the market leaders in the UK and Ireland. All landrollers are manufactured to the highest standard and are available from 2.5m (8ft) to 2.7m (9ft). One of the unique features on the Fleming hydraulic Landrollers is the unique hinged draw-bar, allowing the roller to be elevated to the transport position giving good ground clearance, protecting the machine on rough terrain and cuts transport time to an absolute minimum from farm to farm.


Available in 2.5 (8ft) and 2.7m (9ft) models with 740mm (30inch) and 890mm (36 inch) dia drums with 12–16mm wall thickness



- Can be filled with water for extra weight and can be transported fully laden
- Heavy duty frame and unique Fleming hinged draw-bar & spring steel shaft
- All drums are air tested after welding
- 30 second change over to transport position
- Hardwood bearing provides better shock absorption giving longer life
- Hardwood bearing for easy greasing and low cost maintenance
- Scraper blade standard
- Performance 12–14 acres per hour
- 80 – 90 horse power required

Trailed & Three Point Linkage Landrollers

Available width 2.5m (8ft), 2.7m (9ft), 3m (10ft) with 740mm (30inch) and 890mm (36 inch) diameter drums with 10mm, 12mm and 16mm wall thickness.

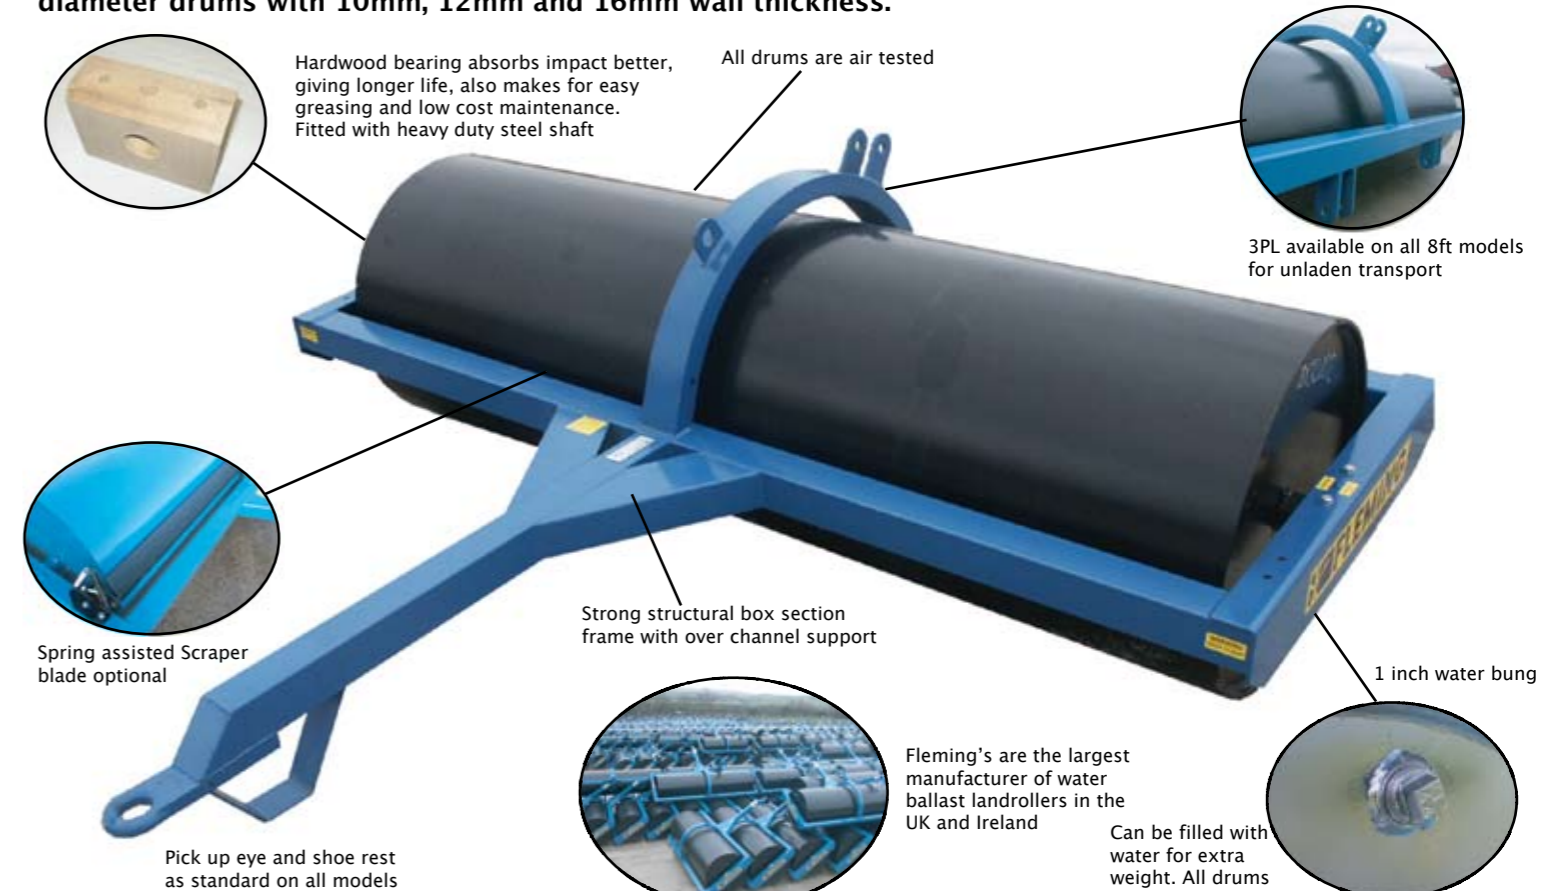

Tandem lead Roller



We strongly recommend that all water ballast rollers are drained over the winter months

We strongly recommend that all water ballast rollers are drained over the winter months