


KBH27A



specifications

Handle type	Double
Displacement	26.3 cm ³
Power	1.6 hp (1.18 kW) @ 7000 rpm
Starting	Recoil starter with KAR Start
Cutter nylon	Bump&Feed 4000rpm (Ø 2.4 mm)
Cutter blade	3-Blade (255 mm dia)
Bearing of shaft	5-plane
Drive shaft diameter	Ø 7 mm
Rotation	Counterclockwise
Guard	Standard size
Dimensions (L x W x H)	1732 x 609 x 450 mm
Fuel	2-stroke premix (ratio 50:1)
Fuel capacity	0.6 liter
Dry weight	4.8 kg
Air filter	Dry type (Foam)
Fuel consumption ratio	678 g/kW.h

FEATURES

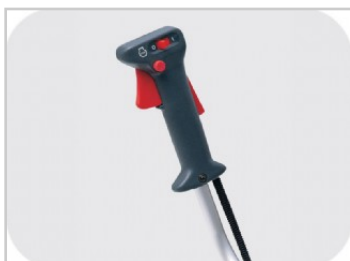

Grip system (double handle)



3-Tooth blade



Nylon cutter head



4-Star blade