


KBH48A



specifications

Handle type	Double
Displacement	48.6 cm ³
Power	3.0 hp (2.21 kW) @ 7000 rpm
Starting	Recoil starter with KAR Start
Cutter nylon	Bump&Feed 4000rpm (Ø 2.4 mm)
Cutter blade	3-Blade (255 mm dia)
Bearing of shaft	5-plane
Drive shaft diameter	Ø 8 mm
Rotation	Counterclockwise
Guard	Standard size
Dimensions (L x W x H)	1838 x 680 x 462 mm
Fuel	2-stroke premix (ratio 50:1)
Fuel capacity	1 liter
Dry weight	7,9 kg
Air filter	Dry type (Foam)
Fuel consumption ratio	544 g/kW.h

FEATURES

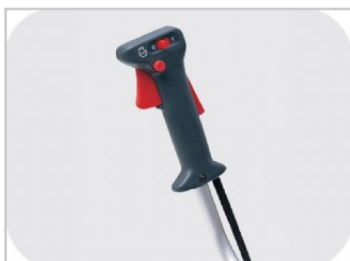

Grip system (double handle)



KAR starter



3-Tooth blade



3-Star blade